




# SPECIFICATIONS

## Fab-Lok® Fasteners

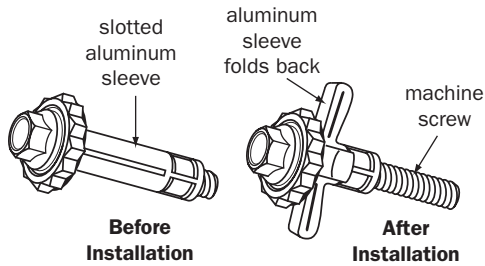


### Features

- Hex washer head machine screw assembled to a slotted aluminum sleeve and EPDM sealing washer
- Low carbon steel or 300 series stainless steel screws
- Installs with power drive equipped with Fab-Lok holding sleeve

### Benefits

- After tightening, clamping tines remain in place even if screw is removed
- Greater joint integrity
- Increased construction efficiency

### Typical Applications

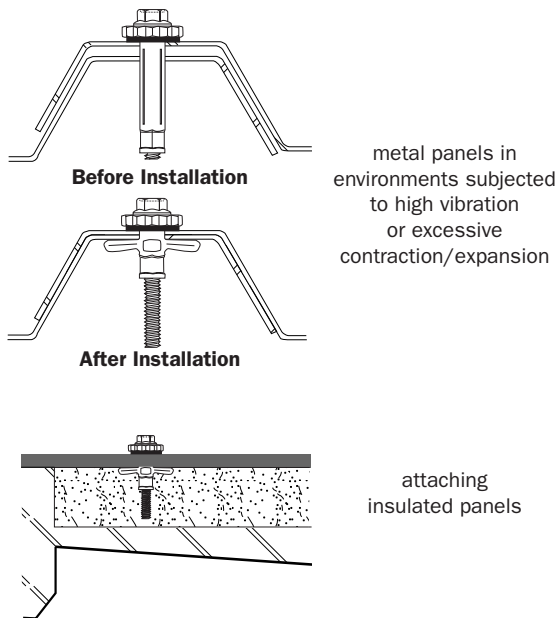

## Fab-Lok Fasteners

### Application:

- Metal panels to steel structurals on buildings where heavy internal movement occurs from operating machinery or excessive external movement occurs from high winds, jet engines, etc.
- Metal panels to steel structurals on buildings subjected to high levels of expansion/contraction
- Repairing separated metal panels
- Blind-hole applications (e.g. attaching insulated panels)

NOTE: Product not intended for structurally-loaded joints.

### Specification:

Machine screw assembled to a slotted aluminum sleeve and EPDM sealing washer

### Lengths:

EZJ100/EZJ210	1.373"
EZJ120/EZJ230	1.612"
EZJ140/EZJ250	1.807"

### Grip Ranges:

EZJ100/EZJ210	.062" – .250"
EZJ120/EZJ230	.250" – .500"
EZJ140/EZJ250	.500" – .750"

### Head Style:

Hex head

### Drive System:

Hex

### Material:

- Screw: Low carbon steel or 300 series stainless steel
- Sleeve: aluminum

### Finish:

Zinc plating

### Installation Tools:

Can be installed with standard drive tools or drive tool equipped with Fab-Lok holding sleeve (EZJ900) and hex socket (EZJ910)

For more information, contact

**Elco Construction Products • 1.800.435.7213**

**www.elcoconstruction.com**